




Overview

ReServ1 Video Surveillance UPS is designed to simultaneously provide power for 12VDC and 24VAC cameras during normal or power outage conditions. True sine wave regulated AC output.

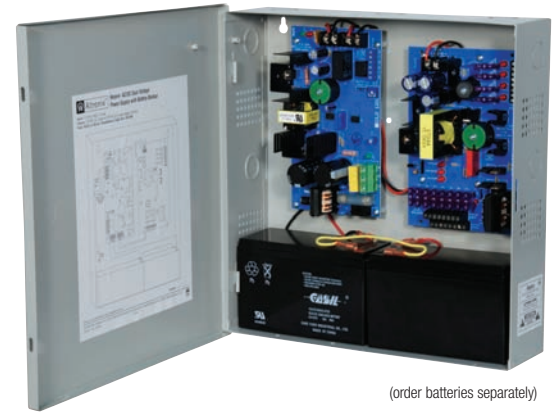

(order batteries separately)



Specifications

Input:

- 115VAC 60 Hz, 1.9 amps.

Output:

- 12 individually fuse protected outputs configured as follows:
 - Eight (8) outputs @ 24VAC.
 - Four (4) outputs @ 12VDC.
- Unit will provide:

24VAC Output	12VDC Output
4 amp (max.)	—
3.5 amp (max.)	1 amp (max.)
3 amp (max.)	2 amp (max.)

- Blade type output fuses are rated at:
AC fuses rated @ 3 amp / 32V.
DC fuses rated @ 3 amp / 32V.

Battery Backup:

- Built-in charger for sealed lead acid or gel type batteries.
- Automatic switchover to stand-by battery when AC fails.

Visual Indicators:

- AC/DC power LED indicators.
- Individual power LED indicators.
- Low voltage input, Overload and Shutdown LED indicators.

Supervision:

- AC fail supervision (form "C" contacts).
- Low battery supervision (form "C" contacts).

Special Features:

- True sine wave regulated AC output.
- Power ON/OFF switch.
- Spare fuses included.
- Unit maintains camera synchronization.
- Ease of installation saves time and eliminates costly labor.

Enclosure:

- Enclosure accommodates up to two (2) 12VDC/7AH batteries.
- Enclosure dimensions:
13.5"H x 13"W x 3.25"D

Shipping Weight (approximate):

- ReServ1: 9.5 lbs.

Enclosure Dimension

13"H x 13.5"W 3.25"D

