


STI 4-Channel and 8-Channel Receiver



STI-34104

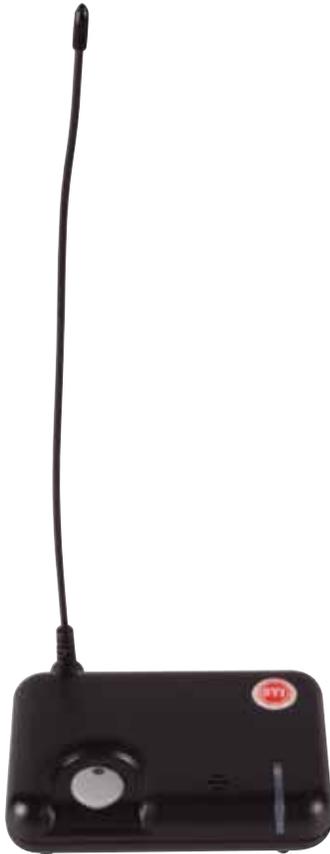

STI-34108

PRODUCT OVERVIEW

STI offers multiple wireless products designed to alert you of several different conditions (such as: an open garage door, mail delivered, a car in the driveway, open exit door, removed fire extinguisher or activated push button, etc.). The 4-Channel or 8-Channel Receivers allow you to monitor up to 4 or 8 different STI wireless alert devices at a single, convenient location. They are supervised for low battery and signal reception and have an audible chime tone or 12 VDC output for siren. The 8-Channel Receiver offers a mirror function that can work with up to four additional 8-Channel Receivers. Devices can be latching or momentary by zone.

HOW IT WORKS

Both receivers supervise transmitter battery and signal reception (low battery is indicated with a short beep between 12 and 24 hours of detection). When the 8-Channel Receiver is placed in Enroll Mode, you have the option to select different zones representing your STI wireless device(s).

FEATURES

- Part of the Wireless Alert Series.
- Monitor 4 or 8 devices at a single, convenient location.
- Supervised for low battery and signal reception.
- Up to 1000 foot (line of sight) range, 433 MHz.
- Audible chime tone or 12 volt output for siren.
- Devices can be latching or momentary by each zone.
- **STI-34104**
 - * Monitors up to 4 devices.
 - * Distinct beep and tone for each of the four devices.
 - * Latching memory LED (flashes until reset).
 - * Input power is 12 volt, 75mA.
- **STI-34108**
 - * Monitors up to 8 devices with 8 zone LED indicators.
 - * Mirror function (works with up to 4 additional 8-Channel Receivers).
 - * Dual antennas for increased signal strength.
 - * Form "C" contact for remote monitoring.
 - * 300mA, 12 volt available for siren output (with 500mA, 12 volt supply).
 - * Measures 5 ¼ x 5 ¾ x 1 ¼".
 - * Key fob available for alert or on/off.

STI 4-Channel and 8-Channel Receiver


Dimensions and Technical Information

MODELS AVAILABLE

STI-34104 4-Channel Receiver
STI-34108 8-Channel Receiver

Accessories:

STI-34105 Voltamax 12 VDC (500mA) power supply
STI-34106 Key Fob for 8-Channel Receiver
STI-34109 Repeater

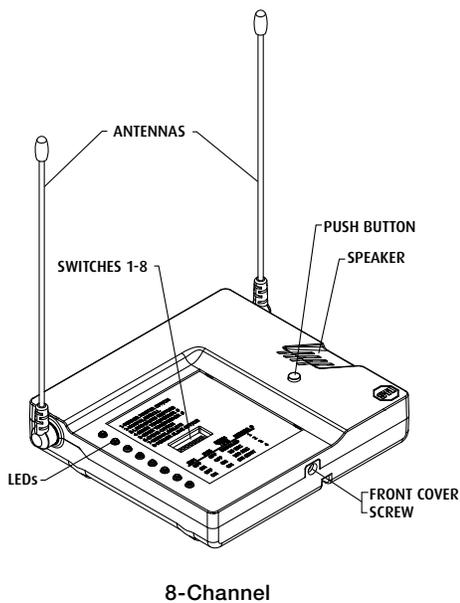

**Safety Technology
International, Inc.**

2306 Airport Road
Waterford, Michigan
48327, USA

Tel: 248-673-9898
Fax: 248-673-1246
Tollfree: 800-888-4784
info@sti-usa.com
www.sti-usa.com

Unit 49G Pipers Road
Park Farm Industrial Estate
Redditch, Worcestershire
B98 0HU England

Tel: 44 (0) 1527 520 999
Fax: 44 (0) 1527 501 999
Free: 0800 085 1678 (UK)
www.sti-europe.com